

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 7 TOWNSHIP 14 RANGE 5

DATE: -10-15-02 1-11-07

PARTY CHIEF: Wilcoxen

CREW: _____

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 8-1-98



IN. S.P.C. E ZONE NAD '83

NAME: 14050705

N: 491400.5664(m)

E: 69805.0537(m)

NOTE: This corner position represents a title corner and may not necessarily be in the position of the Record corner.

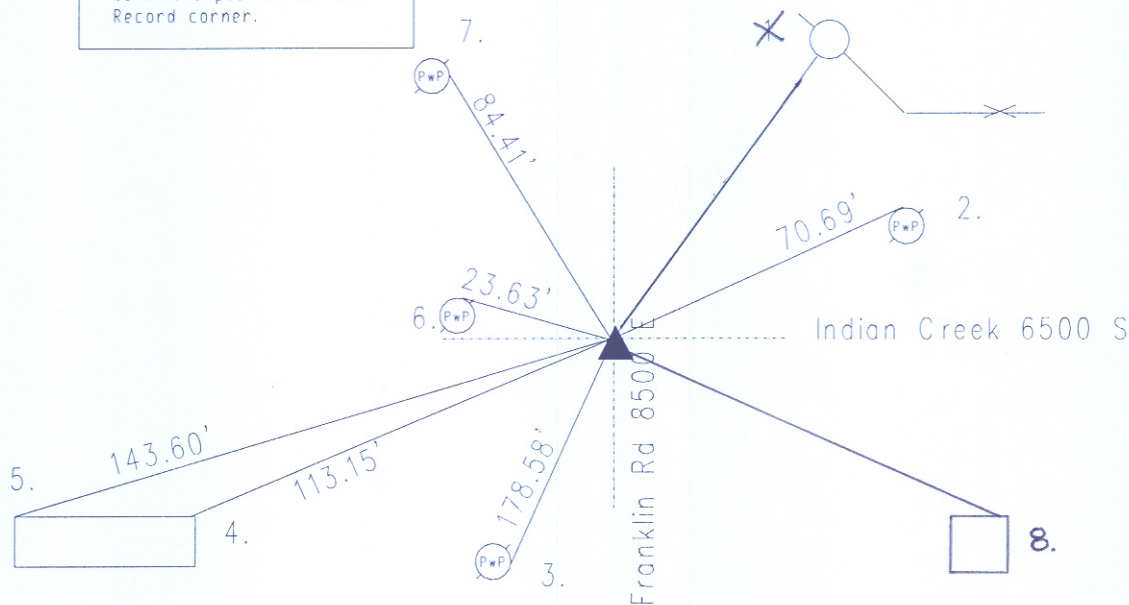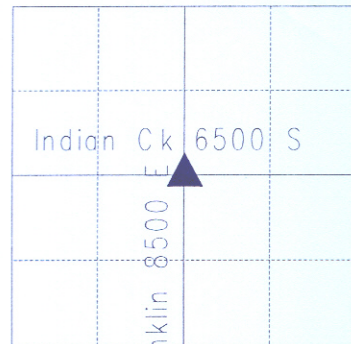

Survey by Hosbrook 11-12-1850 called no stones nor witnesses per Franklin Township Legal Survey Book pg. 34. MCSO at unknown date called an iron pin. Monroe 3-11-58 called nail w/brass washer over steel pin. Miller 11-19-76 called road nail in washer. Wilcoxen 2-6-80 called same. Greene 6-22-93 called railroad spike with cut 'x'. Excavated 8-1-98 by Wilcoxen and railroad spike w/cut 'x' found at surface. 1 1/4" steel pin found 13" dn. under the railroad spike. Harrison set. Re-tied 8-1-98 by Wilcoxen. Re-tied 10-15-02 by Wilcoxen. 14050705

REF.	DISTANCE	DESCRIPTION
1.	72.85'	Face of fence post
2.	70.69'	Mag nail w/brass washer N PwP#139-741 18"up
3.	178.58'	Road nail E PwP#54-770 12"up
4.	113.15'	NE corner of church
5.	143.60'	NW corner of church
6.	23.63'	PK nail N pwP# 1-740 12"up
7.	84.41'	Mag nail w/brass washer E PwP#207-740 12"up
8.	92.95'	NE corner of stone column 20"up